

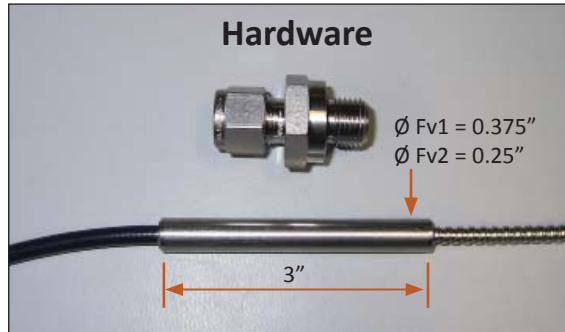


## Vacuum Passthru Models Fv1 & Fv2

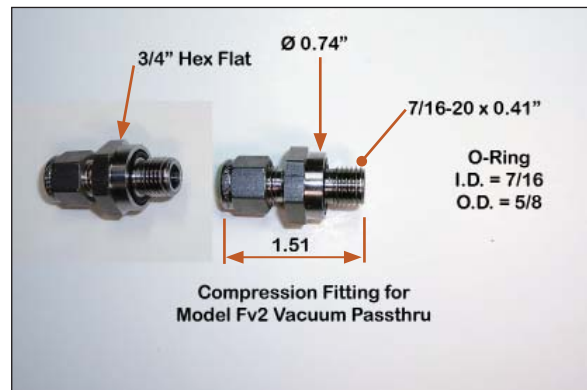


Models **Fv1** and **Fv2** provide a low cost means for achieving measurements in low to moderate vacuum ( $10^{-4}$  Torr). A solid stainless steel section is included on the fiberoptic cable. The fiberoptics pass thru and are potted in with epoxy. A straight thread o-ring compression fitting is provided for sealing at the vacuum bulkhead. Nylon compression fittings are provided.

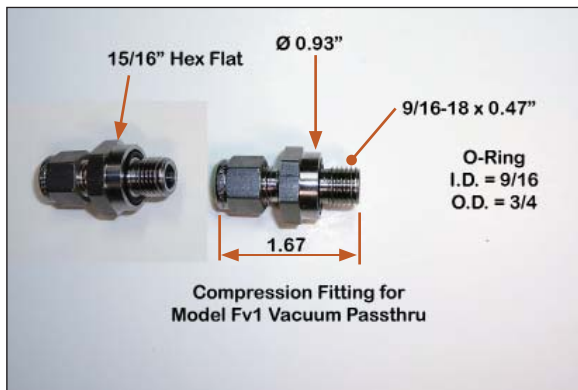

### NOTE

Fv1 has a  $\varnothing$  0.375" section and requires the large compression fitting. Fv2 has a  $\varnothing$  0.250" section and uses the small compression fitting. Fiberoptic cable sheathing diameters dictate which model can be used.

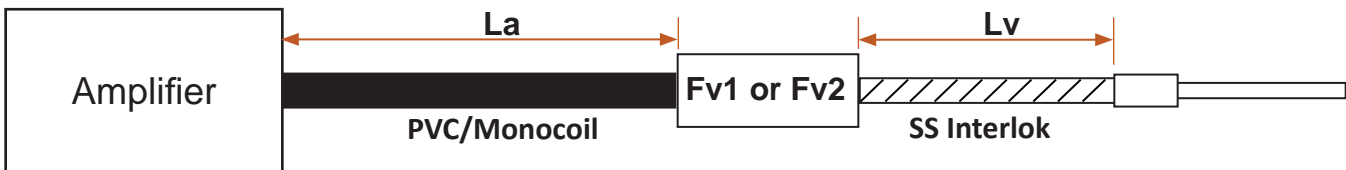

### FEATURES

- Vacuum Range to  $10^{-4}$  Torr
- Mounting by Compression Fitting
- User Selectable Cable Lengths in Air and Vacuum
- Works with Any Philtec D or RC Model Sensor

# PHILTEC

www.philtec.com

Fiberoptic Sensors for the Measurement of Distance, Displacement and Vibration